

BRYAN STEAM

Overflow Traps Size ranges from 2" - 6"



The most reliable overflow trap on the market.

100-year proven design.

John J. Hoppes created his first overflow trap over 100 years ago. Today, Bryan Steam builds units based on this original design concept which has proven so efficient in thousands of installations through the years.

Quality products.


Bryan overflow trap bodies are constructed of cast iron. Inside the body, a double-sealed

brass valve is automatically operated by a stainless steel ball float. As you can see, only the highest quality materials are used.

Many sizes.

Our mechanical float-controlled overflow traps come in a range of sizes from 2" through 6". And they're in stock for immediate shipment.

Bryan Steam Overflow Traps

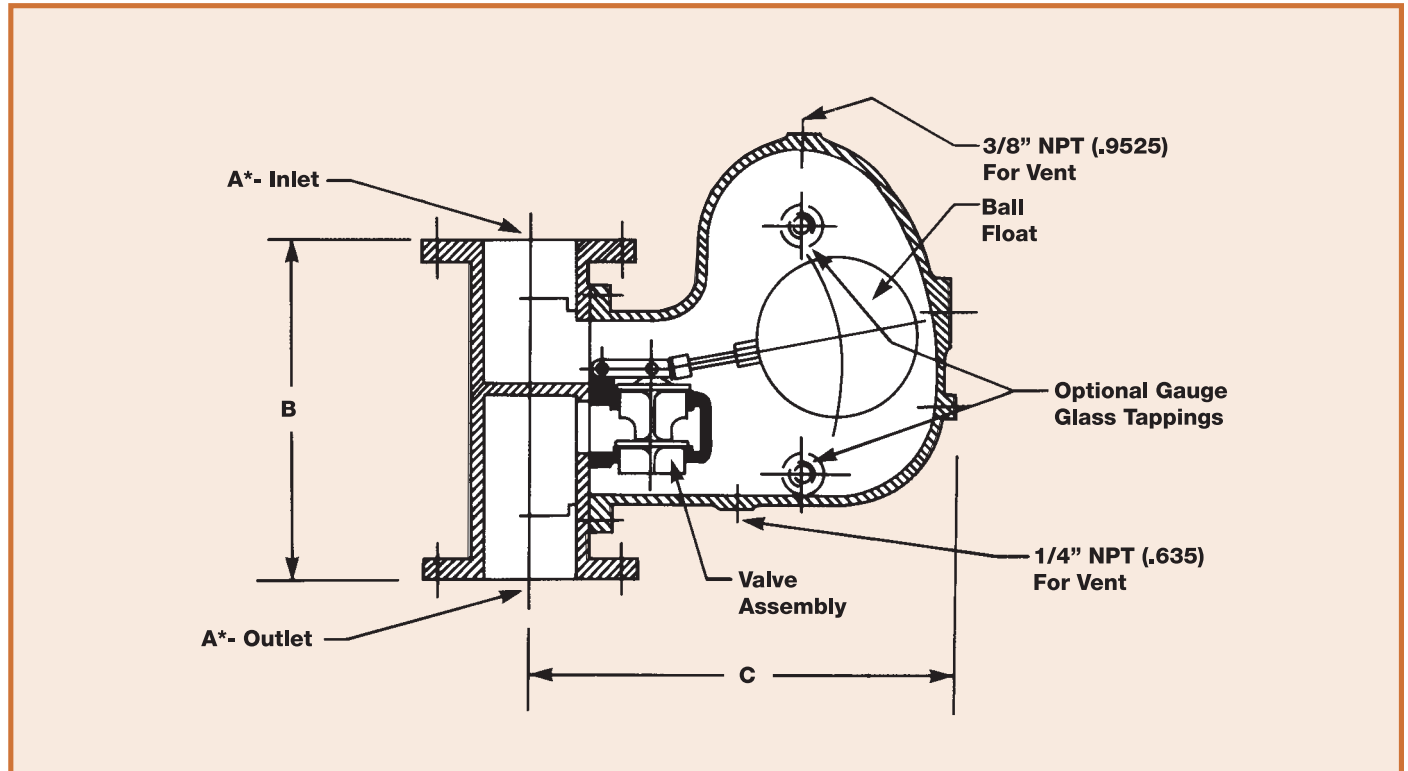

MODEL NO.	DEAERATOR RATED CAPACITY IN LBS/HR	DIMENSIONS IN INCHES (CM)			APPROX. SHIP WT. LBS. (KG)
		A	B	C	
HT-2	10,000 thru 15,000	2 (5.08)	6 ³ / ₄ (17.15)	12 ⁵ / ₈ (32.07)	50 (22.7)
HT-3	20,000 thru 100,000	3 (7.62)	14 ³ / ₄ (37.47)	17 ³ / ₄ (45.09)	155 (70.3)
HT-4	45,000 thru 171,000	4 (10.16)	14 ¹ / ₂ (36.83)	17 ³ / ₄ (45.09)	165 (74.8)
HT-6	175,000 thru 385,000	6 (15.24)	14 ³ / ₄ (37.47)	26 ¹ / ₄ (66.68)	310 (140.6)

**NOTE: HT-2 has NPT connection. HT-3 to HT-6 has flanged connection. Specifications subject to change without notice.*



Bryan Steam LLC — Leaders Since 1916
 783 N. Chili Ave., Peru, Indiana 46970 U.S.A.
 Phone: 765-473-6651 • Internet: www.bryanboilers.com
 Fax: 765-473-3074 • E-mail: bryanboilers@iquest.net