




FREE FLEX CONDENSING BOILERS - SUBMITTAL DATA SHEET

RATINGS AND CAPACITIES		
Input - High Fire	6,000,000	BTU/HR
Output - High Fire	5,700,000	BTU/HR
Boiler Horsepower	170.3	BHP
AHRI Certified Thermal Efficiency	95.0%	
Fuel	Natural Gas	
Firing Rate	Full Modulation	
Burner Turndown	Up to 20:1	
Low NOx Emissions	Capable, Consult Factory	
Inlet Gas Pressure (NG)	7"wc	Min.
	14"wc	Max.
Shipping Weight, Approximate	5,400	lbs


ASME Section IV (Max 160 PSIG / 210°F)	
ETL Certified to UL 795 and CAN 3.1.1	

DIMENSIONS / CONNECTIONS	
- Height	81"
- Width	63-1/4"
- Length	102"
- Supply / Return Connections	6" Flange
- Vent / Air Intake Connections	14"
- Condensate / Boiler Drain Conn.	1"
- Gas Connection	2"


STANDARD EQUIPMENT	
- ASME Stainless Steel Heat Exchanger	
- Stainless Steel Mesh Pre-Mix Burner	
- Variable Speed Combustion Blower	
- Siemens LMV3 Burner Management and Parallel Positioning	
- Fuel-to-Air Ratio System with (9) Programmable Points	
- High Limit Temperature Control, Manual Reset	
- Water Flow Switch	
- Low Water Cutoff, Manual Reset	
- Condensate Trap	
- Blocked Condensate Switch	
- Combustion Air Proving Switch	
- Blocked Vent Air Switch	
- Pressure Relief Valve	
- Pressure & Temperature Gauges	
- Flue Gas Temperature Sensor	
- (2) Motorized Gas Valves with Proof of Closure	
- Supervised Pilot / UV Scanner	
- High/Low Gas Pressure Switches, Manual Reset	
- 208-240/3/60 Line Voltage (26.6 Amps)	
- 480/3/60 Line Voltage (14.25 Amps)	
- Category IV Individual Venting	
- Category II Common Venting with Engineered Vent System	
- Polypropylene & Stainless Steel Acceptable *Material	
- Ducted or Room Combustion Air Intake	

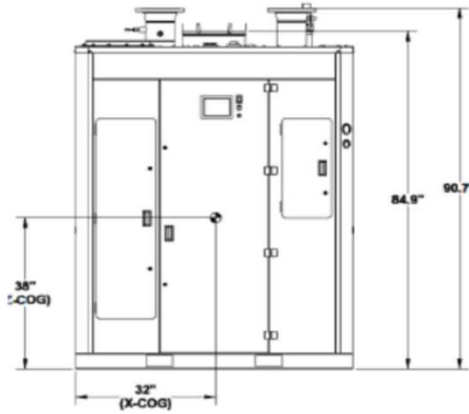


FRONT VIEW

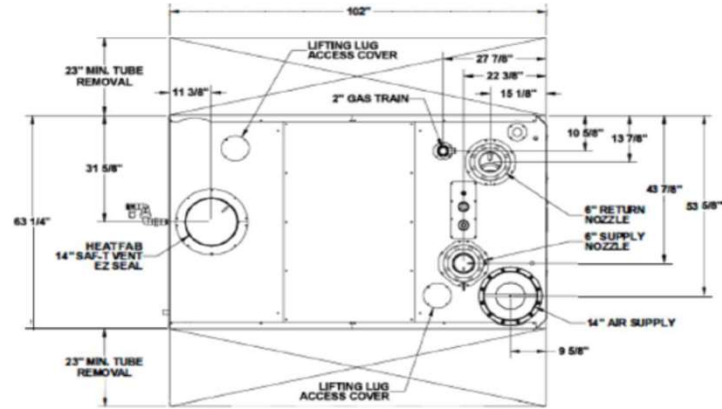

TOP VIEW

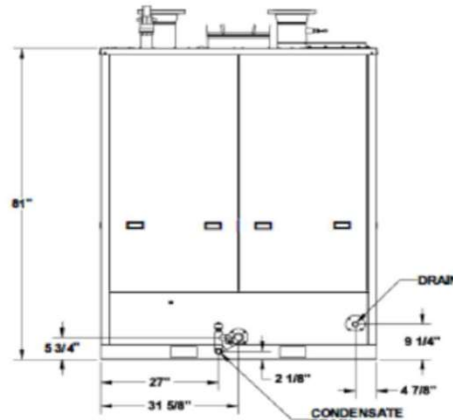

REAR VIEW

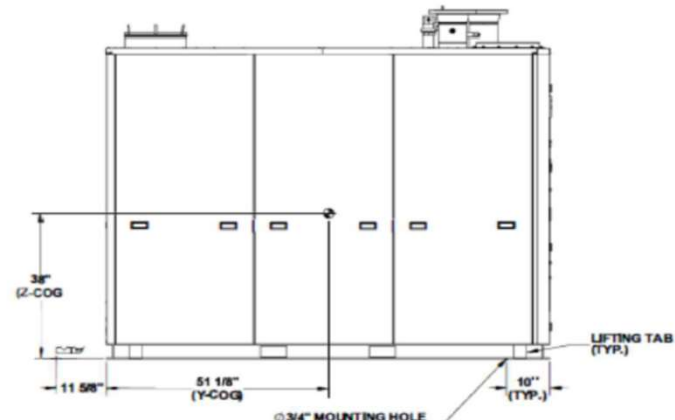

LEFT SIDE VIEW

* Flue system material shall be capable of continuous operation at 230°F or higher, have the same corrosion resistance to flue gas condensation as AL29-4C and shall be certified to UL 1738 – venting system for gas-burning appliances cat II, III and IV.

NOTES: 1. Dimensions shown are for reference only and subject to change without written notice.
2. See O&M for required installation clearances

FLOWS AND PRESSURE DROPS					
Delta T	Flow (GPM)	Δ P (Ft. Hd)	Delta T	Flow (GPM)	Δ P (Ft. Hd)
20°F Δ T (Max)	570	37.92	50°F Δ T	228	6.00
25°F Δ T	456	24.25	60°F Δ T	190	4.17
30°F Δ T	380	16.83	70°F Δ T	163	2.50
35°F Δ T	326	12.33	80°F Δ T	143	0.92
40°F Δ T	285	9.42	90°F Δ T	127	0.75
45°F Δ T	253	7.42	100°F Δ T (Min)	114	0.67

FF-6000
PROPERTY OF BRYAN®
783 N. Chili Ave, Peru IN 46970
Boiler Technology Leadership Since 1916 www.bryanboilers.com

Updated 3/16/2023